

SUBMITTAL: GASKETED ACCESS PANEL - ATM SERIES

This Gasketed Panel is ideal for laboratories, pressurized rooms, dusty or high-moisture environments. The frame and door are specially designed to form a tight seal reducing air infiltration. Sizes up to 24" W by 36" H.

Frame & Trim: 16 gauge CRS with 1/2" retainer channel for gasket and 1-1/4" trim flange.

Door: 16 gauge rolled and welded. Cam-operated closure with knurled knob compresses door tightly to gasket.

Gasket: Fully gasketed on all sides with EPDM rubber.



Finish: Gray primer powder coat finish.

Options at additional Cost:

- ☐ (F) Flush Latch
- ☐ (FL) Flush Locking Latch
- ☐ #4 Stainless Steel
- ☐ Galvanized
- ☐ Optional Colors - [See website](#)



Recessed Flush Locking Latch

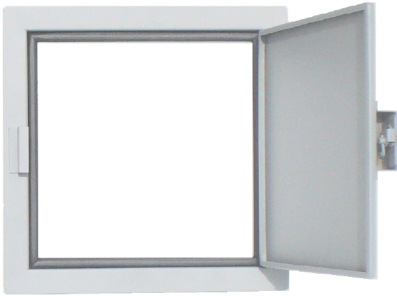

ATM Shown with Standard Knurled Knob & Latch (ATM-1212)





ATM Shown with Optional Recessed Flush Locking Latch (ATM-1212 F)

QTY	Model Size Width x Height	Outside Frame Dimensions		Wall Opening Dimensions		Approx-Shipping Weight	Latches
		Width	Height	Width	Height		
	12" x 12"	14-9/16"	14-9/16"	12-1/2"	12-1/2"	7 lbs	1
	18" x 18"	20-9/16"	20-9/16"	18-1/2"	18-1/2"	16 lbs	1
	24" x 24"	26-9/16"	26-9/16"	24-1/2"	24-1/2"	28 lbs	2
	24" x 36"	26-9/16"	38-9/16"	24-1/2"	36-1/2"	42 lbs	2

See drawings on page 2

SUBMITTAL: GASKETED ACCESS PANEL - ATM SERIES

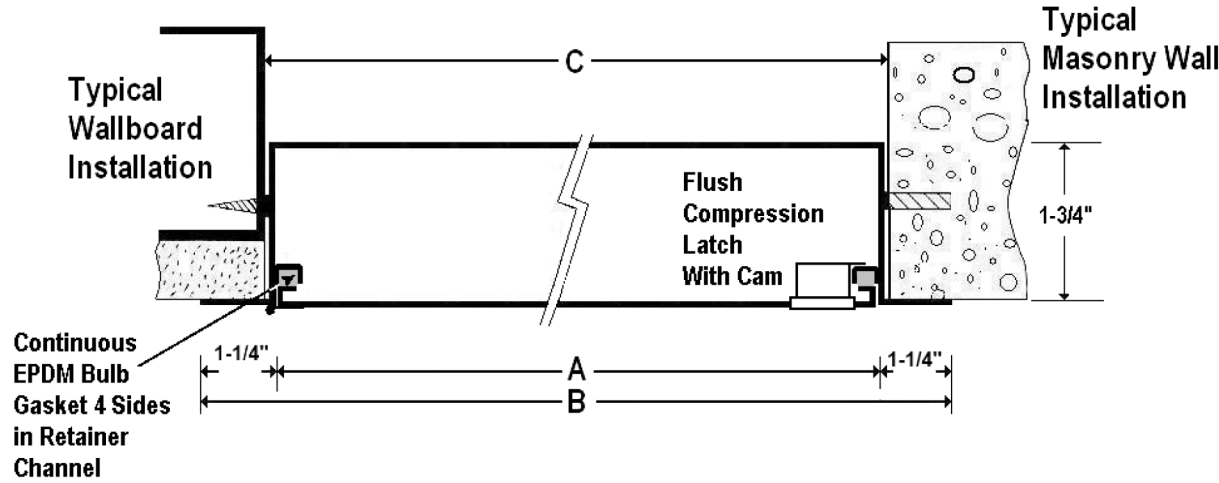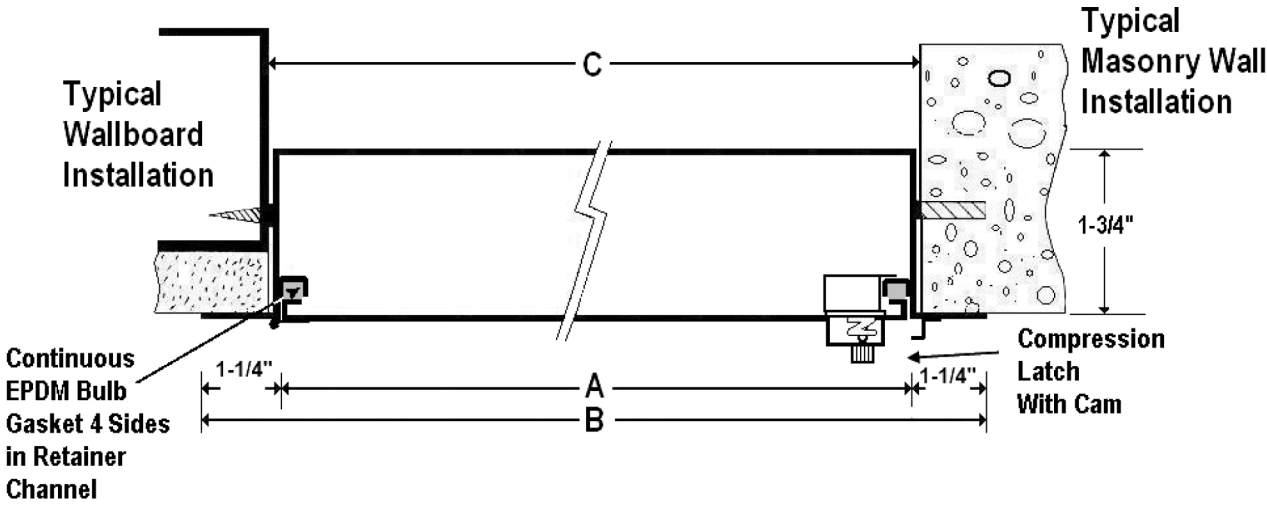

ATM with Optional Flush Compression Latch