

SUBMITTAL: MODEL CP FLUSH ACCESS PANELS

Model CP for Plaster Wall or Ceilings :

Door face has plasterguard in 1/2" recess, and the frame features 3" expanded metal lath wings to accept application of plaster to match surrounding walls. A continuous hinge, ensures easy opening of the panel. Screwdriver operated cam locks are provided, the size of the door determining the number.

SPECIFICATIONS:

**Door Panel:** 1/2" Recessed Metal lath over 18 gauge steel. Recessed door depths from 1/4" to 7/8".

**Indicate Door Recess Here:** \_\_\_\_\_



**Frame:** 16 gauge steel with 1" wide plasterguard with an additional 3" wide wing of metal lath for a plaster application to the edge of the door. Plasterguard is recessed 3/4" inch from face of frame.

**Finish:** Gray primer coat

**Hinge:** Continuous hinge mounted on the long side of panels.

**Lock:** Flush screwdriver-operated steel cam standard. Sleeve provided to allow access to lock after finishing.

**NOTE:** Order Size = ID of Frame

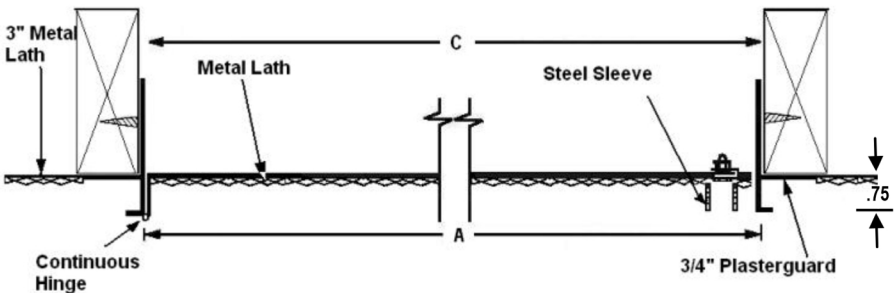

**NOTE:** Order Size = ID of Frame

OPTIONAL FEATURES AT ADDITIONAL COST:

- ☐ Optional colors - [see catalog or website](#)  
W-White, R-Red, BK-Black, S-sand  
FBK-Flat Black, , AB-AMS Beige, B-Bronze  
SB-SC Flat Beige, , SI - Silver

- ☐ (L) Cylinder lock installed  
☐ (CT) Torx head cam  
☐ (CA) Hex head cam  
☐ (SHC) Spanner head cam

QTY	A MODEL SIZE	C WALL OPENING DIMENSIONS		SHIPPING WEIGHT APPROX.	LATCH(ES)
	WIDTH X HEIGHT	WIDTH	HEIGHT		
	12" X 12"	12 1/4 "	12 1/4 "	9 lbs	1
	12" X 24"	12 1/4 "	24 1/4 "	14 lbs	2
	18" X 18"	18 1/4 "	18 1/4 "	14 lbs	3
	22" X 30"	22 1/4 "	30 1/4 "	21 lbs	4
	24" X 24"	24 1/4 "	24 1/4 "	20 lbs	4
	24" X 36"	24 1/4 "	36 1/4 "	31 lbs	5