

SUBMITTAL: MODEL CTWB FLUSH ACCESS PANELS

PAGE 1 OF 1

Model CTWB for a Gypsum Wallboard-Covered Panel in Gypsum Wallboard Walls or Ceilings :

For the most unobtrusive appearance, the CTWB Series is designed for an inset of gypsum wallboard to cover the door panels with exposure of only the narrow frame edges. Gypsum wallboard up to 1" thick is accommodated by the recessed panel. Adhesive mastic attaches the wallboard to the door and ensures that it is flush with surrounding wallboard. A continuous hinge located at the outside edge of the door, ensures easy opening of the panel. Wallboard bead allows smooth finish to edge of frame.

SPECIFICATIONS:

Door Panel: 18 gauge steel, recessed 1" for tile or drywall.

Frame: 16 gauge steel with 1" wallboard bead.

Finish: White primer coat

Hinge: Continuous hinge mounted on the long side of oblong panels.

Lock: Flush screwdriver-operated steel cam standard.

OPTIONAL FEATURES AT ADDITIONAL COST:

☐ Optional color Code: _____ - see catalog or [website](#)

W-White, **R**-Red, **BK**-Black, **S**-sand

FBK-Flat Black, **AB**-AMS Beige, **B**-Bronze

SB-SC Flat Beige, **SA** - Satin Aluminum

☐ (L) Cylinder lock installed


☐ (CT) Torx head cam

☐ (CA) Hex head cam

☐ (SHC) Spanner head cam

☐ Optional Door Panel Depth (1/4-1") _____"

Panel shown partially-covered by gypsum wallboard at right

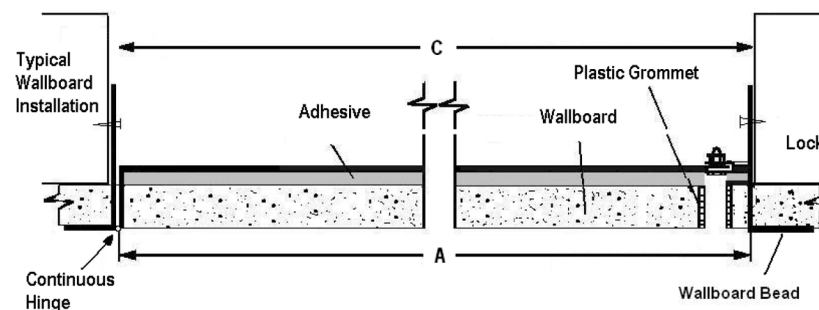

QTY	A MODEL SIZE	C WALL OPENING DIMENSIONS		APPROX. SHIPPING WEIGHT	LATCH (ES)
	WIDTH X HEIGHT	WIDTH	HEIGHT		
	12" X 12"	12 1/4 "	12 1/4 "	7 lbs	1
	12" X 24"	12 1/4 "	24 1/4 "	11 lbs	2
	18" X 18"	18 1/4 "	18 1/4 "	12 lbs	3
	22" X 30"	22 1/4 "	30 1/4 "	21 lbs	4
	24" X 24"	24 1/4 "	24 1/4 "	19 lbs	4
	24" X 36"	24 1/4 "	36 1/4 "	27 lbs	5