



## FD3CI SERIES - 3 HOUR FIRE-RATED UP-SWINGING ACCESS PANEL FOR CEILINGS

A 3 Hour Fire-Rated Access Panel for Ceilings with a Door that Swings into the Wall Recess

**Materials:** Painted galvanized steel or 304 stainless steel

**Frame:** 16 ga (1.61 mm) steel , depth 3-1/2" (89mm)

**Wall Trim:** Exterior flange Width - 7/8" (22mm )

**Door Panel:** 18 ga Liner 22 ga with interior lifting handle.


**Insulation:** The door panel contains 2 1/2" (63 mm) of high temperature insulation material.

**Finishes:** Paint finish is an electrostatically applied rust-inhibitive prime coat or # 4 polished stainless steel finish on the exterior surface.

**Hinges:** Concealed continuous piano hinge allows the door panel to open into a vertical position. The hinge is placed on the "H" dimension.

**Panel Closer:** The design of the unit allows the door panel to be self-closing.

**Latch:** The standard factory installed latch is a flush mount 1/4" allen key. All fire-rated locks are self-latching and include an interior latch release.

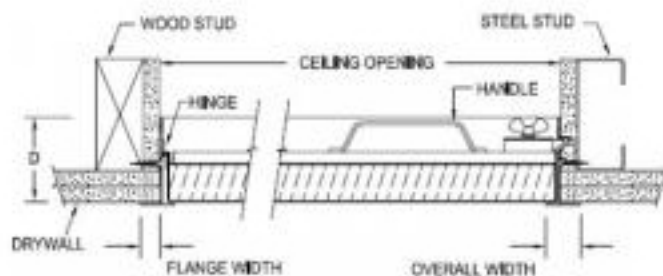

This model of wall and ceiling fire-rated panels is manufactured under the factory inspection service of Intertek Warnock Hersey) and have a label reading: "Listed access frame and insulated fire door assembly 3 hour fire rating. Horizontal Installation Only."