

SUBMITTAL: SMT ACCESS PANEL

Model SMT for Masonry, Tile and Wallboard This all purpose frameless 16 gauge steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. The SMT is primarily used for new installations or remodeling on masonry, tile, wood or other wall surfaces.


The door is mounted to the 1" trim with a concealed continuous hinge and swings open for ease in servicing. The door is secured with screwdriver-operated cam locks, and a key-operated cylinder lock can be furnished in place of one cam lock. Screws may be used to fasten the SMT model securely in place through mounting holes in each corner.

Materials:

Door Panel: 16 gauge steel

Frame: 16 gauge steel

Finish: Gray prime coat

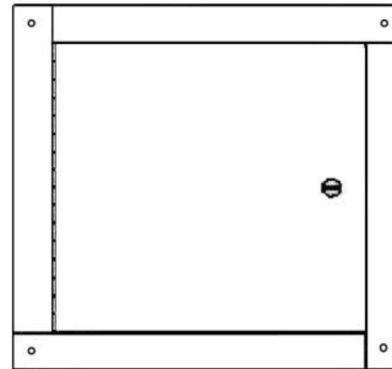

PAGE 1 OF 1



OPTIONAL FEATURES AT ADDITIONAL COST:

- ☐ Louvers
- ☐ #4 Stainless Steel Finish
- ☐ Optional Color Code: ____ - see [Website](#).
 W-White, R-Red, BK-Black, S-sand
 FBK-Flat Black, , AB-AMS Beige, B-Bronze
 SB-SC Flat Beige, , SA - Satin Aluminum
- ☐ Custom colors - submit paint chip.
- ☐ (L) Cylinder lock installed
- ☐ (KK) Knob cam
- ☐ (CT) Torx head cam
- ☐ (CA) Hex head cam
- ☐ (SHC) Spanner head cam

Model SMT Surface Mount Access Panel							
Qty	Model Size Width x Height	Outside Frame Dimensions		Wall Opening Dimensions		Shipping Weight	Latches
		Width	Height	Width	Height		
	8 x 8	10"	10"	8"	8"	3 lbs	1
	12 x 12	14"	14"	12"	12"	7 lbs	1
	16 x 16	18"	18"	16"	16"	12 lbs	1
	24 x 24	26"	26"	24"	24"	27 lbs	4

