William Hird & Co, Inc.

@ 255 40th Street Brooklyn, NY 11232
Call Now (718) 499-4881

SUBMITTAL: MODEL TMS STAINLESS STEEL FLUSH ACCESS PANELS

Qty	A Model Size	B Outside Frame Dimensions		C Wall Opening Dimensions		Ship Wt. in lbs	Latch(es)
	Width X Ht	Width	Height	Width	Height		
	6" x 6"	8"	8"	6 3/8"	6 3/8"	4	1
	8" x 8"	10"	10"	8 3/8"	8 3/8"	4	1
	8" x 12"	10"	14"	8 3/8"	2 3/8"	6	1
	10" x 10"	12"	12"	10 3/8"	10 3/8"	6	1
	12" x 12"	14"	14"	12 3/8"	12 3/8"	7	1
	12" x 16"	14"	18"	12 3/8"	16 3/8"	9	1
	12" x 18"	14"	20"	12 3/8"	18 3/8"	10	1
	12" x 24"	14"	26"	12 3/8"	24 3/8"	12	2
	14" x 14"	16"	16"	14 3/8"	14 3/8"	9	1
	16" x 16"	18"	18"	16 3/8"	16 3/8"	11	1
	16" x 20"	18"	22"	16 3/8"	20 3/8"	13	2
	18" x 18"	20"	20"	18 3/8"	18 3/8"	12	3
	20" x 24"	22"	26"	20 3/8"	24 3/8"	15	4
	20" x 30"	22"	32"	20 3/8"	30 3/8"	20	4
	22" x 22"	24"	24"	22 3/8"	22 3/8"	17	4
	22" x 30"	24"	32"	22 3/8"	30 3/8"	22	4
	22" x 36"	24"	38"	22 3/8"	36 3/8"	24	5
	24" x 24"	26"	26"	24 3/8"	24 3/8"	18	4
	24" x 30"	26"	32"	24 3/8"	30 3/8"	22	5
	24" x 36"	26"	38"	24 3/8"	36 3/8"	25	5
	30" x 30"	32"	32"	30 3/8"	30 3/8"	30	5
	36" x 36"	38"	38"	36 3/8"	36 3/8"	41	5
	36" x 48"	38"	50"	36 3/8"	48 3/8"	51	6

8 Models in bold above are stocked in one or more of our warehouse & manufacturing locations. See the Quick Ship Listing.
We specialize in producing panels with custom sizes and features.
Contact Customer Service with your requirements.

Model TMS for Masonry, Tile and Wallboard is an all purpose 16 gauge stainless steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. Use the TMS for hospital and restaurant applications. The exposed 1" frame flange adds rigidity and conceals rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place. Nails, bolts or masonry anchors may be used to fasten the TMS model securely in place.

SPECIFICATIONS

Frame: 18 gauge, stainless steel with 1" wall flange. 1-5/8" depth.

Door: 16 gauge, stainless steel mounted with 90° continuous, concealed stainless steel hinge.

Finish: 304 stainless, #4 Satin finish.

Lock: Flush screwdriver-operated steel cam - **C**.



Order Format Example: TMS-2424C

TMS - Width Height Lock (C Std or Option Code) Special Finish

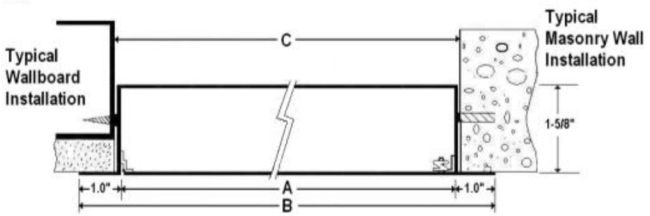

OPTIONAL FEATURES AT ADDITIONAL COST:

- 14 Gauge Construction Door& Frame
- 14 Gauge Door
- Double door
- Plexiglass view window
- Stainless 316 Finish
- Rain Hood
- Gasketing
- **(RD)** Removable Door (no hinges)
- **(L)** Cylinder lock installed
- **(MP)** Mortise cam lock prep
- **(MPI)** Mortise cam lock (06431) installed
- **(UM)** Mortise slam lock prep
- **(UMI)** Mortise slam lock (06431) installed
- **(LL)** Mortise deadbolt prep
- **(LLI)** Mortise deadbolt lock (06431) installed
- **(KK)** Knob cam
- **(CT)** Torx head cam
- **(CA)** Hex head cam
- **(SHC)** Spanner head cam
- Other 1-1/8" dia. mortise cylinder by request

View Lock Options Online Here

Copyright © 2013 William Hird & Co., Inc.