

FIRE HOSE AND VALVE CABINETS

OCCULT SERIES

GENERAL DESCRIPTION: The Occult Series fire hose and valve cabinets features an attractive door and concealed hinge which combine to give the cabinet a clean, trimless appearance. When the door is closed, it completely covers the cabinet's flange, which is on the outside of the wall surface.

BOX SPECIFICATION: All units have a cold-rolled steel box with a 3/4" wide flange (**Occult cabinets with the fire-rated option have a 1" wide flange and larger overall dimensions - see the table below**). The standard color is matte black and white is available, if specified. The 0-4016 combination valve and extinguisher cabinet is furnished with a heavy gauge steel shelf, 12" up from the bottom of the box, leaving approximately 28" of available space for the fire extinguisher.

DOOR SPECIFICATION: The Occult door is 5/8" thick and is available in the Solid or Vertical Duo style - each available with the optional Larsen-Loc®, which provides the protection of a locked cabinet without requiring the breaking of glass to gain emergency access to the cabinet. The concealed hinge is constructed of aluminum with a stainless steel pin and allows the door to open 180 degrees. The standard door material is cold-rolled **steel** with white baked acrylic enamel, which can be used either as a finish or prime coat. Optional door materials include **aluminum, stainless steel, solid brass, and solid bronze**. The **aluminum** door has a satin anodized finish. Clear anodized is standard and a selection of optional color anodized finishes is available. The standard stainless steel door is 304 stainless steel with #4 finish. **Solid brass** and **solid bronze** doors feature a standard satin finish with a clear protective coating. Optional polished finishes are available for the stainless steel, brass and solid bronze doors. All standard Occult doors are supplied with a satin finish pull handle with a self adjusting roller catch. If specified, the pull handle can be deleted. Larsen's optional die cast "FIRE" handle can be specified in lieu of the standard pull handle (see page 20). Some of the more common Occult door styles are pictured below; however the full selection of door styles is listed below.

TO SPECIFY THE OCCULT SERIES:

1. Use the appropriate prefix for the corresponding door material. For **steel** - **no prefix is required**. For **aluminum** - use **AL**. For **stainless steel** - use **SS**. For **solid brass** - use **B**. For **solid bronze** - use **BZ**. (If required, specify optional polished finishes for **stainless, brass, or bronze**).


2. Select the required **model number** from the table below.

3. Select the **door style** (Solid or Vertical Duo) and if required, the **optional die cut lettering**.


4. If the Vertical Duo Door is specified, select the required **glazing** from the list below (DSA is standard).

5. If required, specify the **Larsen-Loc®**, which can be combined with the Solid Door or any of the V-Duo Door glazing options listed below.

6. **The pull handle is standard**. If required, specify the option of deleting the standard pull handle or substituting the optional die cast "FIRE" handle (see page 20). **NOTE: The standard pull handle or the "FIRE" handle must be used, if the Larsen-Loc® is specified.**

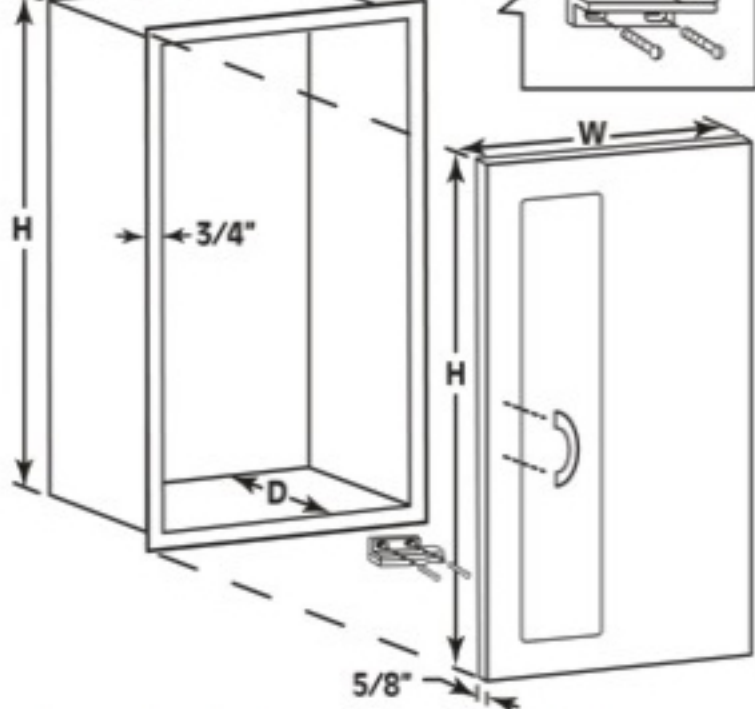7. If the **fire-rated option** is required, see special dimensions for model numbers with the **FS** prefix in the table below.
- 

NOTE: "FS" models denote Larsen's "Flame-Shield" fire-rated cabinets. When specifying Larsen's "Flame-Shield" fire-rated cabinet option for the Occult Series, refer to the dimension chart below and select from the models with an "FS" prefix. For complete details of the "Flame-Shield" option.

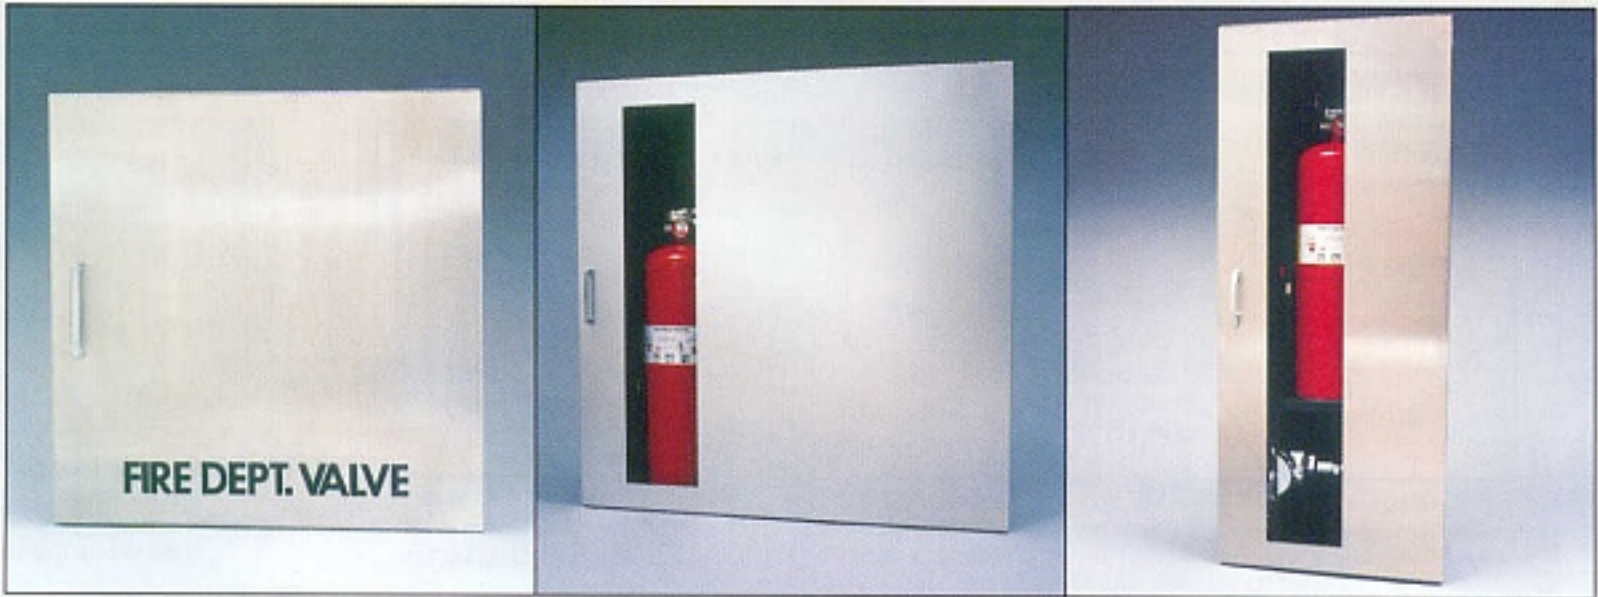

SS O-1818 Solid Door with Black Horizontal Die Cut Lettering

AL O-3232 Vertical Duo Door

SS O-4016 Vertical Duo Door

DIMENSIONS							
Model Number	Inside Box Dimensions H x W x D	Outside flange Dimensions H x W	Outside Door Dimensions H x W	Rough Opening H x W x D	Knockout Locations E F G	Interior Capacity	
O-1818	18 x 18 x 8½	19½ x 19½	19¾ x 19¾	18½ x 18½ x 8¾	9" 4"	One Fire Dept. valve w/cap & chain	
FS O-1818	18 x 18 x 8½	21 x 21	21¼ x 21¼	20 x 20 x 9½	--		
O-4016	40 x 16 x 8½	41½ x 17½	41¾ x 17¾	40½ x 16½ x 8¾	- 6" 4"	One Fire Dept. valve w/cap & chain & a Fire Ext.	
FS O-4016	40 x 16 x 8½	43 x 19	43¾ x 19¾	42 x 18 x 9½	--		
O-3232	32 x 32 x 8½	33½ x 33½	33¾ x 33¾	32½ x 32½ x 8¾	4" 4" 4"	One hose rack unit with 100 ft. of rack hose & a Fire Ext.	
FS O-3232	32 x 32 x 8½	35 x 35	35¼ x 35¼	34 x 34 x 9½	--		

Note: Consult Occult Series Fire Extinguisher Cabinets

Door Style:

- Solid
 - Vertical Duo
- Optional Larsen-Loc® (Available with either Solid or V-Duo Door)

Lettering Color:

- Red
- Black
- White

Lettering Style:

- Vertical
- Horizontal
- Type A

Door Glazings & Options:

- DSA Glass (standard)
- 1/8" Acrylic
- 1/4" Acrylic
- Clear Wire
- Tempered Safety Glass
- Laminated Safety Glass
- Solar Gray
- Solar Bronze

NOTE: All Occult Series cabinets comply with ADA wall projection.