

Flush Fire-Rated Access Panels

Larsen's has a fire-rated access panel for any wall or ceiling application. The 1" wide flange frame (**L-FRAP**) is standard. Stainless steel units are available in 304 with #4 finish (**L-FRAPSS**). For concealment, Larsen's offers drywall corner bead or plaster bead frames. These will allow finish material to be applied, leaving only the panel exposed (please contact Larsen's for sizing and availability).


L-FRAP



Fire-rated, flush access panel for all applications



Standard knurled knob/key operated latch bolt

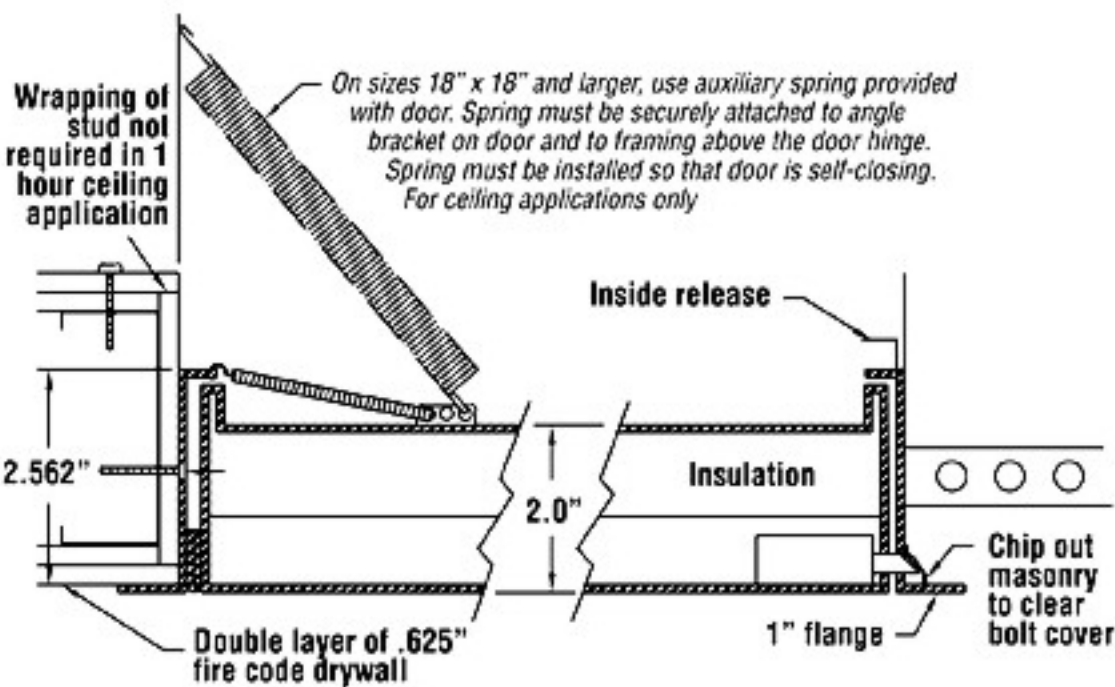

UL Listed "B" Label for 1.5 hrs in walls
(maximum temperature rise to 250°F in .5 hrs)

Warnock-Hersey listed for 3 hrs in ceilings

Fire-Rated access panels are available with an optional mortise preparation for 1.125" cylinder.



L-FRAP	L-FRAPSS	Part	Description
X		Door	20 ga. cold rolled steel
	X	Door	304 Stainless steel
X	X	Frame	16 ga. with 1" flange
X	X	Hinge	Concealed continuous piano hinge
X	X	Latch	Knurled knob/key operated latch bolt
X		Finish	Phosphate dipped and prime coated
	X	Finish	#4
X	X	Insulation	2" fire-rated mineral fiber

Width x Height		Latches
mm	inches	
203 x 203	08 x 08	1
254 x 254	10 x 10	1
305 x 305	12 x 12	1
305 x 610	12 x 24	1
356 x 356	14 x 14	1
406 x 406	16 x 16	1
457 x 457	18 x 18	1
508 x 762	20 x 30	1
559 x 559	22 x 22	1
559 x 762	22 x 30	1
559 x 914	22 x 36	2
610 x 610	24 x 24	1
610 x 762	24 x 30	1
610 x 914	24 x 36	2
610 x 1219	24 x 48*	2
762 x 762	30 x 30*	1
813 x 813	32 x 32*	1
914 x 914	36 x 36*	2

Rough Opening = Panel Size + .25"

L-FRAP is available in 304 stainless steel with #4 finish (**L-FRAPSS**)

All access panels are hinged on the second dimension (height).

*Exceeds maximum size to carry a Warnock-Hersey label in ceilings