



Larsen's® FRAMES & DOOR WORKSHEET

Customer Name _____

Date _____

Project _____

Quantity _____

To accurately measure for new frames, please follow steps 1-4 and fill in *all* blanks with appropriate measurements.

1.

Open existing door as far as it will open.


2.

Measure inside height (A) and width (B) where trim overlaps the tub.

Dimension A

Dimension B

Note: On measurement B, you must measure up to the hinge leaf.

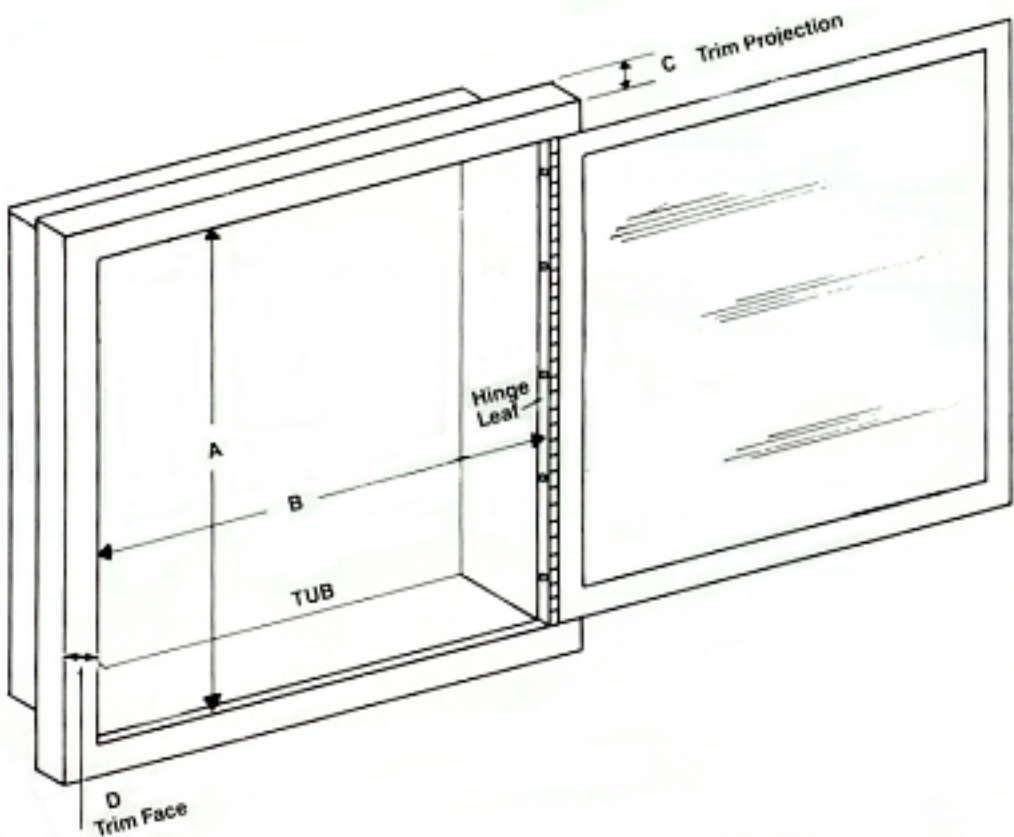

3.

How far does the existing trim project from the wall?

Dimension C

4.

How wide is the existing trim face?

Dimension D


DOOR OPTIONS *CIRCLE ONE*




FULL GLASS



* LARSEN-LOC




* HORIZONTAL DUO



VERTICAL DUO



SOLID



SOLID WITH LOCK

DOORS ARE GLAZED WITH 1/8" CLEAR ACRYLIC

* NOTE: Horizontal Duo and Larsen-Loc® will be hinged on right side unless otherwise specified.

SPECIFICATIONS

Formed aluminum frame and extruded aluminum hollow door 1/2" thick with clear satin anodized finish. Turn handle and matching aluminum hinge.

INSTALLATION

Remove existing door at hinge. Newformed frame will fit over existing frame. Inside flange of formed frame can be mounted to inside of tub with sheet metal screws.