

PROJECT:	LOCATION:
MODEL NUMBER:	QUANTITY:
ARCHITECT:	CONTRACTOR:
DATE:	DISTRIBUTOR:


SPECIFICATIONS:

All recessed and semi-recessed cabinets and surface-mounted steel cabinets have a heavy gauge, white baked enamel box. Surface-mounted cabinets with aluminum door and trim have a box constructed entirely of clear or color anodized aluminum. Surface-mounted cabinets with stainless steel door and trim have a box constructed entirely of 304 stainless steel with a #4 finish.

Steel and stainless steel cabinets have a full $\frac{1}{2}$ " thick hollow metal heavy gauge door. Trims and doors feature one piece construction with satin finish turn handle, continuous matching hinge, and self-adjusting roller catch. Baked white enamel finish is standard for steel units. Stainless steel cabinets have a #4 finish, 304 stainless steel.

Aluminum cabinet doors and trims are extruded or fabricated aluminum with clear satin anodized finish. Aluminum door is $\frac{1}{2}$ " thick with satin finish matching pull handle and hinge. Color anodized finishes are available as options.

STEP 1: Select cabinet model number from the dimensions on the back of this sheet (or on attached sheet) and indicate on the top of this sheet. To specify aluminum trim and door, use the prefix, "AL" before the model number. To specify stainless steel trim and door, use the prefix, "SS" before the model number. Note: Rough opening dimensions are larger for fire-rated cabinets. Please refer to separate Fire-Rated Cabinet Submittal and Detail Sheet.

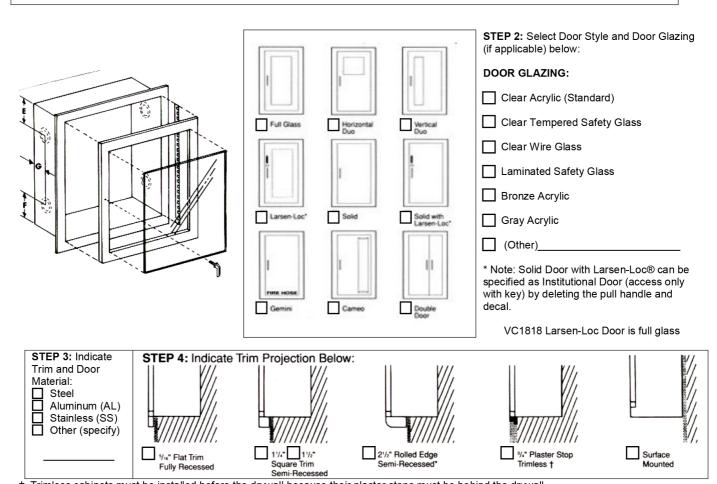

[†] Trimless cabinets must be installed before the drywall because their plaster stops must be behind the drywall. Trimless cabinets are not recommended for block wall installation.

CABINET DIMENSIONS - VALVE CABINETS							
Model Number	Trim Style and Projection	Inside Box Dimensions* HxWxD	Outside Trim Dimensions HxW***	Rough Opening HxWxD	Knockout Locations** E G	Interior Capacity	
VC 1818-R VC 1818-RK VC 1818-RL VC 1818-RT VC 1818-SM	Rec. 5/16 Semi-Rec. 11/4 Semi-Rec. 21/2 Trimless Surface Mtd.	18 x 18 x 8 18 x 18 x 8 18 x 18 x 8 18 x 18 x	21½ x 21½ 21½ x 21½ 21½ x 21½ 21½ x 21½	19 x 19 x 8¼ 19 x 19 x 7¼ 19 x 19 x 6 xx8½† 	9" 4" 9" 4" 9" 4" 9" 4"	One 2½" Fire Dept. valve with cap And chain	
Model Number	Trim Style and Projection	Inside Box Dimensions* HxWxD	Outside Trim Dimensions HxW***	Rough Opening HxWxD	Knockout Locations** E F G	Interior Capacity	
VC 2430-R VC 2430-RK VC 2430-RL VC 2430-RT VC 2430-SM	Rec. 5/16 Semi-Rec. 11/4 Semi-Rec. 21/2 Trimless Surface Mtd.	30 x 24 x 8 30 x 24 x 8 30 x 24 x 8 30 x 24 x 8 30 x 24 x 8	33½ x 27½ 33½ x 27½ 33½ x 27½ 33½ x 27½	31 x 25 x 8¼ 31 x 25 x 7¼ 31 x 25 x 6 xx8½† 	4" 4" 4" 4" 4" 4" 4" 4" 4" 4" 4" 4"	Two Fire Dept. valves and a fire extinguisher or one hose rack unit with 75 ft. of rack hose	

Model Number	Trim Style and Projection	Inside Box Dimensions* HxWxD	Outside Trim Dimensions HxW***	Rough Opening HxWxD	Knockout Locations** E G	Interior Capacity
VC 2626-R VC 2626-RK VC 2626-RL VC 2626-RT VC 2626-SM	Rec. 5/16 Semi-Rec. 1¼ Semi-Rec. 2½ Trimless Surface Mtd.	26 x 26 x 8 26 x 26 x 8 26 x 26 x 8 26 x 26 x 8 29½ x 29½ x 8½	29½ x 29½ 29½ x 29½ 29½ x 29½ 29½ x 29½	27 x 27 x 8¼ 27 x 27 x 7¼ 27 x 27 x 6 xx 8½† 	13" 4" 13" 4" 13" 4" 13" 4"	One 2½" Fire Dept. valve with cap and chain
Model Number	Trim Style and Projection	Inside Box Dimensions* HxWxD	Outside Trim Dimensions HxW***	Rough Opening HxWxD	Knockout Locations** F G	Interior Capacity
VC 4016-R VC 4016-RK VC 4016-RL VC 4016-RT VC 4016-SM	Rec. 5/16 Semi-Rec. 11/4 Semi-Rec. 21/2 Trimless Surface Mtd.	40 x 16 x 8 40 x 16 x 8 40 x 16 x 8 40 x 16 x 8 40 x 16 x 8	43½ x 19½ 43½ x 19½ 43½ x 19½ 43½ x 19½	41 x 17 x 8¼ 41 x 17 x 7¼ 41 x 17 x 6 xx 8½†	6" 4" 6" 4" 6" 4" 6" 4"	One 2½" Fire Dept valve with cap and chain and a Fire Extinguisher
Model Number	Trim Style and Projection	Inside Box Dimensions* HxWxD	Outside Trim Dimensions HxW	Rough Opening HxWxD	Knockout Locations** F G	Interior Capacity
VC 3616-R VC 3616-RK VC 3616-RL VC 3616-RT VC 3616-SM	Rec. 5/16 Semi-Rec. 11/4 Semi-Rec. 21/2 Trimless Surface Mtd.	36x 16 x 8 36x 16 x 8 36x 16 x 8 36x 16 x 8 36x 16 x 8 39½ x 19½ x 8½	39½ x 19½ 39½ x 19½ 39½ x 19½ 39½ x 19½	37 x 17 x 8¼ 37 x 17 x 7¼ 37 x 17 x 6 xx 8½†	6" 4" 6" 4" 6" 4" 6" 4"	One 2½" Fire Dept valve with cap and chain and one of the following Fire Ext. MP2½,MP5, DC2½, DC5,MP6,MP10,DC6, DC10, CD5

*FOR MODEL NUMBERS VC4016 and VC3616:

If the shelf is to be deleted with the valve installed at the top, insert the prefix "T" before "VC" and note the "E" knockout location of 6".

ROUGH OPENINGS ARE LARGER FOR FIRE-RATED CABINETS. PLEASE REFER TO FIRE-RATED CABINET SUBMITTAL AND DETAIL SHEET.

- No knockouts are provided for surface mounted cabinets unless specified. See knockout drawing on reverse side.
 Trimless cabinets must be installed before the drywall plaster stop must be behind the drywall. Trimless
- are not recommended for block wall installation.

 *** Deduct 3/4" from HxW Dimensions for Cabinets with Aluminum Door & Trim.