

SUBMITTAL: MODEL PW & PWE FLUSH ACCESS PANELS

PAGE 1 OF 1

Models PW & PWE for Plaster Walls or Ceilings :

The panel frame features 3/4" plasterguard for application of plaster. Model PWE has additional 3" expanded metal lath wings to accept application of plaster to match surrounding walls. A continuous hinge, ensures easy opening of the panel. Screwdriver operated cam locks are provided, the size of the door determining the number. Note: Order Size is= ID of Frame

SPECIFICATIONS PW:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

Frame: 16 gauge steel with 3/4" wide plasterguard that is recessed 3/4" for application of plaster.

Finish: Gray primer coat

Lock: Flush screwdriver-operated steel cam standard.

SPECIFICATIONS PWE:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

Frame: 16 gauge steel with 3/4" plasterguard and with an additional 3" wide wing of metal lath for a plaster application to the edge of the door. Plasterguard is recessed 3/4".

Finish: Gray primer coat


Lock: Flush screwdriver-operated steel cam standard.



PWE With 3" Expanded Metal



PW with 3/4" Plasterguard

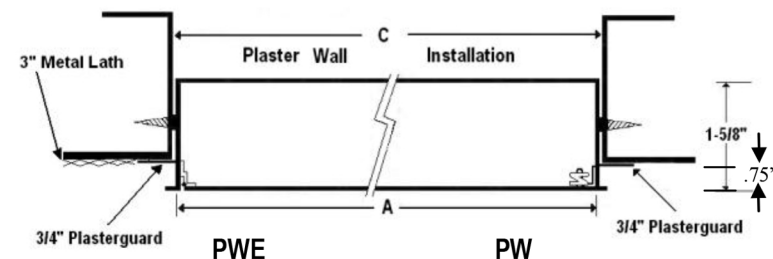

Order Format Example: PW-2424L BK

PW - **Width** **Height** **Lock** **Special**
(C Std or Option Code) Finish

OPTIONAL FEATURES AT ADDITIONAL COST:

- ☐ Double door
- ☐ Louvered vents
- ☐ Plexiglass view window
- ☐ (G) Galvanized finish
- ☐ (RD) Removable Door (no hinges)
- ☐ Optional color Code: _____ - see catalog or [website](#)
- W**-White, **R**-Red, **BK**-Black, **S**-Sand
- FBK**-Flat Black, **AB**-AMS Beige, **B**-Bronze
- SB**-SC Flat Beige, **SI** - Silver
- ☐ Custom colors - submit paint chip.

- ☐ (L) Cylinder lock installed
- ☐ (MP) Mortise cam lock prep 1-1/8" dia, 1-1/4" length
- ☐ (MPI) Mortise cam lock (06431) installed
- ☐ (UM) Mortise slam lock prep
- ☐ (UMI) Mortise slam lock (06431) installed
- ☐ (LL) Mortise deadbolt prep
- ☐ (LLI) Mortise deadbolt lock (06431) installed
- ☐ (KK) Knob cam
- ☐ (CT) Torx head cam [View Lock Options Online](#)
- ☐ (CA) Hex head cam
- ☐ (SHC) Spanner head cam
- ☐ Other 1-1/8" dia. mortise cylinder by request

QTY	A - MODEL SIZE	C - WALL OPENING DIMENSIONS		SHIPPING WEIGHT APPROX.	LATCH (ES)
	WIDTH X HEIGHT	WIDTH	HEIGHT		
	12" X 12"	12 1/4 "	12 1/4"	7 lbs	1
	16" X 16"	16 1/4 "	16 1/4"	10 lbs	1
	16" x 20"	16 1/4"	20 1/4"	12 lbs	2
	18" X 18"	18 1/4 "	18 1/4"	12 lbs	3
	24" X 24"	24 1/4 "	24 1/4"	19 lbs	4

[SEVERAL SIZES PW AVAILABLE FOR 1 DAY SHIPPING FROM SELECTED WAREHOUSES](#)