

FIRE HOSE AND VALVE CABINETS**HC3030, HC3232 and HC3234 SERIES****TO SPECIFY THE HC3030, HC3232 and HC3234 SERIES:**

- Insert, after "HC" the appropriate prefix for the trim and door material.
If STEEL - Use S. If ALUMINUM - Use AL.
If STAINLESS STEEL - Use SS.
If BRASS - Use B. If BRONZE - Use BZ.
(Brass and Bronze available only in the HC3030 Series)
- Select the required model number from the table below.
- Select the door style from the illustrations.

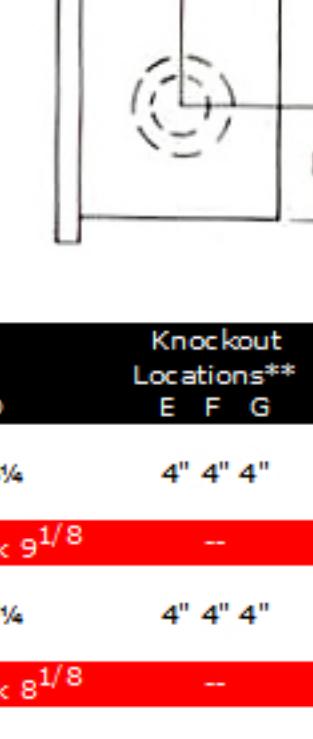
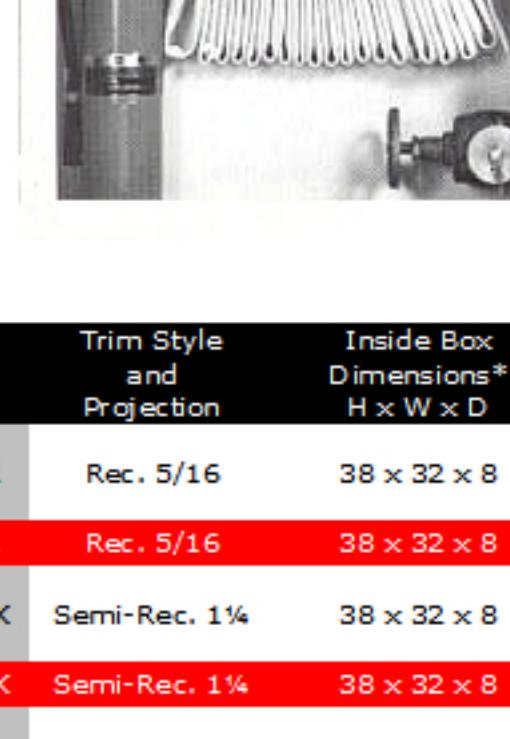
**DIMENSIONS**

Model Number	Trim Style and Projection	Inside Box Dimensions* H x W x D	Outside Trim Dimensions H x W***	Rough Opening H x W x D	Knockout Locations** E F G	Interior Capacity
HC3030-R	Rec. 5/16	30 x 30 x 8	33 1/2 x 33 1/2	31 x 31 x 8 1/4	4" 4" 4"	
FS HC3030-R	Rec. 5/16	30 x 30 x 8	33 1/2 x 33 1/2	32 1/8 x 32 1/8 x 9 1/8	--	
HC3030-RK	Semi-Rec. 1 1/4	30 x 30 x 8	33 1/2 x 33 1/2	31 x 31 x 7 1/4	4" 4" 4"	
FS HC3030-RK	Semi-Rec. 1 1/4	30 x 30 x 8	33 1/2 x 33 1/2	32 1/8 x 32 1/8 x 8 1/8	--	
HC3030-RL	Semi-Rec. 2 1/2	30 x 30 x 8	33 1/2 x 33 1/2	31 x 31 x 6	4" 4" 4"	
FS HC3030-RL	Semi-Rec. 2 1/2	30 x 30 x 8	33 1/2 x 33 1/2	32 1/8 x 32 1/8 x 7	--	One hose rack unit with 100 ft. of rack hose and a fire extinguisher
HC3030-RT	Trimless	30 x 30 x 8	--	--x--x8 1/2 †	4" 4" 4"	
HC3030-SM	Surface Mtd.	33 1/2 x 33 1/2 x 8 1/2	33 1/2 x 33 1/2	--	--	
HC3232-R	Rec. 5/16	32 x 32 x 8	35 1/2 x 35 1/2	33 x 33 x 8 1/4	4" 4" 4"	
FS HC3232-R	Rec. 5/16	32 x 32 x 8	35 1/2 x 35 1/2	34 1/8 x 34 1/8 x 9 1/8	--	
HC3232-RK	Semi-Rec. 1 1/4	32 x 32 x 8	35 1/2 x 35 1/2	33 x 33 x 7 1/4	4" 4" 4"	
FS HC3232-RK	Semi-Rec. 1 1/4	32 x 32 x 8	35 1/2 x 35 1/2	34 1/8 x 34 1/8 x 8 1/8	--	
HC3232-RL	Semi-Rec. 2 1/2	32 x 32 x 8	35 1/2 x 35 1/2	33 x 33 x 6	4" 4" 4"	
FS HC3232-RL	Semi-Rec. 2 1/2	32 x 32 x 8	35 1/2 x 35 1/2	34 1/8 x 34 1/8 x 7	--	One hose rack unit with 100 ft. of rack hose and a fire extinguisher
HC3232-RT	Trimless	32 x 32 x 8	--	--x--x8 1/2 †	4" 4" 4"	
HC3232-SM	Surface Mtd.	35 1/2 x 35 1/2 x 8 1/2	35 1/2 x 35 1/2	--	--	
HC3234-R	Rec. 5/16	34 x 32 x 8	37 1/2 x 35 1/2	35 x 33 x 8 1/4	4" 4" 4"	
FS HC3234-R	Rec. 5/16	34 x 32 x 8	33 7/8 x 35 1/2	36 1/8 x 34 1/8 x 9 1/8	--	
HC3234-RK	Semi-Rec. 1 1/4	34 x 32 x 8	37 1/2 x 35 1/2	35 x 33 x 7 1/4	4" 4" 4"	
FS HC3234-RK	Semi-Rec. 1 1/4	34 x 32 x 8	37 1/2 x 35 1/2	36 1/8 x 34 1/8 x 8 1/8	--	
HC3234-RL	Semi-Rec. 2 1/2	34 x 32 x 8	37 1/2 x 35 1/2	35 x 33 x 6	4" 4" 4"	
FS HC3234-RL	Semi-Rec. 2 1/2	34 x 32 x 8	37 1/2 x 35 1/2	36 1/8 x 34 1/8 x 7	--	One hose rack unit with 100 ft. of rack hose and a fire extinguisher
HC3234-RT	Trimless	34 x 32 x 8	--	--x--x8 1/2 †	4" 4" 4"	
HC3234-SM	Surface Mtd.	37 1/2 x 35 1/2 x 8 1/2	37 1/2 x 35 1/2	--	--	

NOTE: "FS" models denote Larsen's "Flame-Shield" fire-rated cabinets. When specifying Larsen's "Flame-Shield" fire-rated cabinet option for valve and hose cabinets, refer to the dimension chart and select from the models with an "FS" prefix. No knockouts are provided with fire-rated valve and hose cabinets. Pipe holes must be drilled by installer and complete instructions are supplied with each fire-rated valve and hose cabinet. For complete details of the "Flame-Shield" option.

HC3238 and HC3242 SERIES**TO SPECIFY THE HC3238 and HC3242 SERIES:**

- Insert, after "HC," the appropriate prefix for the trim and door material.
If STEEL - Use S.
If ALUMINUM - Use AL.
If STAINLESS STEEL - Use SS.
- Select the required model number from the table below.
- Select the door style from the illustrations.

**DIMENSIONS**

Model Number	Trim Style and Projection	Inside Box Dimensions* H x W x D	Outside Trim Dimensions H x W***	Rough Opening H x W x D	Knockout Locations** E F G	Interior Capacity
HC3238-R	Rec. 5/16	38 x 32 x 8	41 1/2 x 35 1/2	39 x 33 x 8 1/4	4" 4" 4"	
FS HC3238-R	Rec. 5/16	38 x 32 x 8	41 1/2 x 35 1/2	40 1/8 x 34 1/8 x 9 1/8	--	
HC3238-RK	Semi-Rec. 1 1/4	38 x 32 x 8	41 1/2 x 35 1/2	39 x 33 x 7 1/4	4" 4" 4"	
FS HC3238-RK	Semi-Rec. 1 1/4	38 x 32 x 8	41 1/2 x 35 1/2	40 1/8 x 34 1/8 x 8 1/8	--	
HC3238-RL	Semi-Rec. 2 1/2	38 x 32 x 8	41 1/2 x 35 1/2	39 x 33 x 6	4" 4" 4"	
FS HC3238-RL	Semi-Rec. 2 1/2	38 x 32 x 8	41 1/2 x 35 1/2	40 1/8 x 34 1/8 x 7	--	
HC3238-RT	Trimless	38 x 32 x 8	--	--x--x8 1/2 †	4" 4" 4"	
HC3238-SM	Surface Mtd.	41 1/2 x 35 1/2 x 8 1/2	41 1/2 x 35 1/2	--	--	
HC3242-R	Rec. 5/16	42 x 32 x 8	45 1/2 x 35 1/2	43 x 33 x 8 1/4	4" 4" 4"	
FS HC3242-R	Rec. 5/16	42 x 32 x 8	45 1/2 x 35 1/2	44 1/8 x 34 1/8 x 9 1/8	--	
HC3242-RK	Semi-Rec. 1 1/4	42 x 32 x 8	45 1/2 x 35 1/2	43 x 33 x 7 1/4	4" 4" 4"	
FS HC3242-RK	Semi-Rec. 1 1/4	42 x 32 x 8	45 1/2 x 35 1/2	44 1/8 x 34 1/8 x 8 1/8	--	
HC3242-RL	Semi-Rec. 2 1/2	42 x 32 x 8	45 1/2 x 35 1/2	43 x 33 x 6	4" 4" 4"	
FS HC3242-RL	Semi-Rec. 2 1/2	42 x 32 x 8	45 1/2 x 35 1/2	44 1/8 x 34 1/8 x 7	--	
HC3242-RT	Trimless	42 x 32 x 8	--	--x--x8 1/2 †	4" 4" 4"	
HC3242-SM	Surface Mtd.	45 1/2 x 35 1/2 x 8 1/2	45 1/2 x 35 1/2	--	--	

* All Hose Cabinets are available with 6" deep box, at no charge, if specified.

** No knockouts are provided for surface-mounted cabinets unless specified.

† Trimless cabinets must be installed before the drywall. Plaster stop must be behind the drywall.

Trimless are not recommended for block wall installation.

*** Deduct 1/4" from HxW Dimensions for Cabinets with Aluminum Door & Trim. This does not apply to "FS" fire-rated option.